


INTRODUCTION

1200x1200mm

We bring you a grand collection of tiles that are available in various sizes. These tiles are designed to create grand urban spaces with their incredible designs and exceptional styles. The 1200x1200mm slabs give a

delightful ambience to a space with its aesthetically rich design options. This size fits well with all kinds of indoor and outdoor spaces as it is compact yet large enough to give a feel of grandeur to a place.

ONE LOCATION, VARIED SIZE OPTIONS.

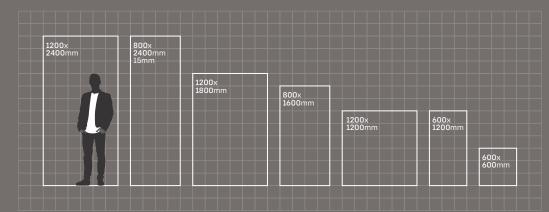



FINISHES + SIZE



HIGH GLOSS



Our slabs provide the ideal size that can be installed in all types of big and small places. These tiles are designed keeping in mind the requirements of modern interior design style.



CUSTOMIZATION


Our slabs are easy to customise making them



EASY INSTALLATION

We break the myth of large-sized tiles being difficult to install with our mega-sized slabs that

1200x 1200mm

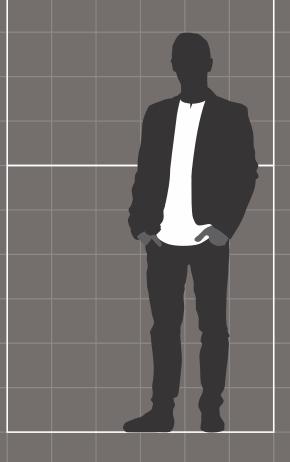



SLABS THAT CREATE ELEGANT AND COMFORTABLE SPACES

- **♥ Scratch Resistant**
- C Resistant to Stains
- Maximum Resistance to Fire and Heat
- Resistant to Abrasion
- Resistance to Freezing and Thawing
- Superior Mechanical Resistance
- Low Water Absorption
- <ô> Dimensional Stability

NATURE'S CREATION

Born from the crest of creation, our tiles reflect the exceptional beauty of nature through their excellent designs that create a glorious ambience for a space.

LOW-MAINTENANCE TILES

We offer tiles that provide a chance to create a fully functional and low maintenance space with its various features that create a comfortable lifestyle.

APPLICATION AREAS

SLABS WITH DIVERSE APPLICATIONS AND EXCELLENT STYLE

We provide a complete tiling solution with our tiles that are easily applicable to many residential as well as commercial spaces. With the multiple sizes, our tiles fit perfectly with every space. Their diverse designs

create a compelling atmosphere and give a graceful look to a place. These tiles provide an extremely comfortable lifestyle with their low-maintenance quality and ability to various applications.



LIVING ROOM



BATHROOM



KITCHEN



LIBRARY



CORPORATE OFFICE



ART GALLERY



HOTEL & RESTAURANT

NEVV ARRIVAL

1200x1200mm

ELEGANCE BLACK

STATUARIO CARA




EGEO BEIGE

SARAN COLLINS CREMA

— 1200x1200mm


ICE ONYX









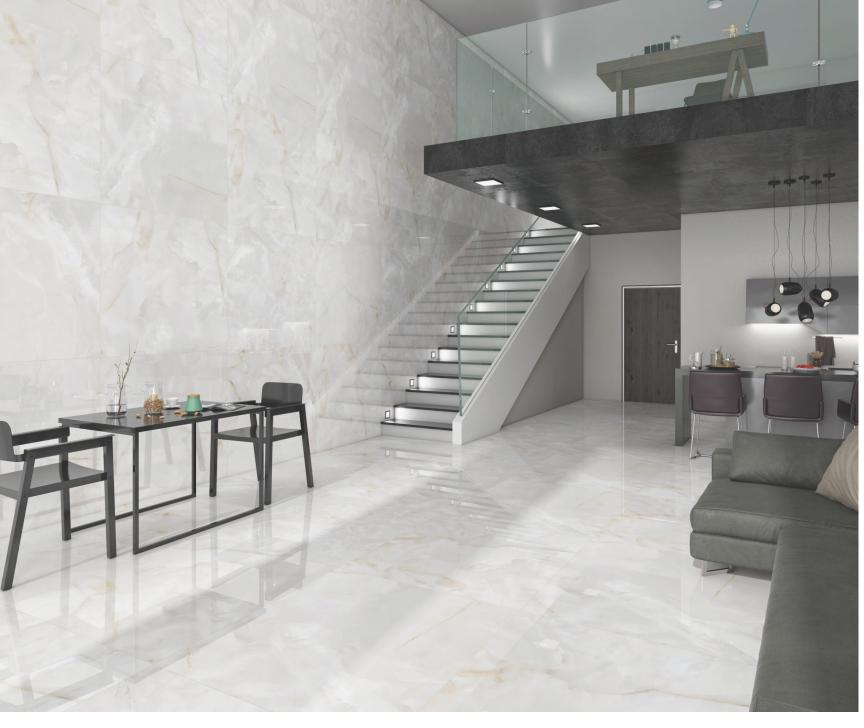

Finish - **HIGH GLOSS** Random - **6**

WALL & FLOOR — ICE ONYX, 1200x1200mm

— 1200x1200mm



Finish - **HIGH GLOSS** Random - **4**




WALL & FLOOR — ARMANI BROWN, 1200x1200mm

ARMANI GREY







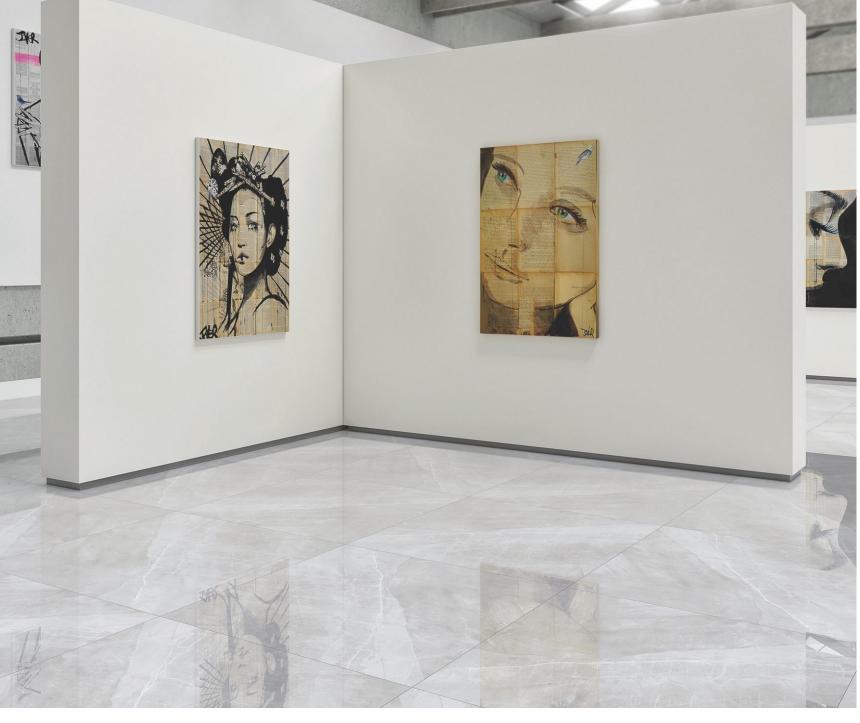

EGEO BEIGE BRECCIA BLUE

FLOOR — BRECCIA BLUE, 1200x1200mm

Finish - **HIGH GLOSS** Random - **4**

Finish - **HIGH GLOSS** Random - **4**











CALACATTA

— 1200x1200mm

Finish - **HIGH GLOSS** Random - **8**

Finish - **HIGH GLOSS** Random - **7**

STATUARIO CARA

WALL & FLOOR — STATUARIO CARA, 1200x1200mm

ELEGANCE GREY








ELEGANCE BLACK









SARAN COLLINS CREMA SARAN COLLINS



Finish - **HIGH GLOSS** Random - **4**



FLOOR — SARAN COLLINS, 1200x1200mm

Technical Specification

| 011454000000000 | TERNATIONAL STANDARD SO13006:2012/EN14411 Group BIa | MEAN VALUE OF OUR TILES | TEST METHOD |
|--|---|--|----------------------|
| Dimension & Surface Quality — | | | |
| length | ± 0.60 % | ± 0.10 % | ISO 10545-2 |
| Thickness | ± 5.00 % | ± 3.00 % | ISO 10545-2 |
| Straightness in side | ± 0.50 % | ± 0.10 % | ISO 10545-2 |
| Rectangularity | ± 0.50 % | ± 0.10 % | ISO 10545-2 |
| Surface flatness | ± 0.50 % | ± 0.510 % | ISO 10545-2 |
| Surface quality | Declared by Manu. | 95~105 % | ISO 2813(Gloss Meter |
| Glossiness (only Polished Products) | Min. 95% Tile Should Be Free From Defects | Min. 98% Tile Should Be Free From Defects | ISO 10545-2 |
| Physical Characteristics — | | | |
| Water absorption | E ≤ 0.5 % | E ≤ 0.5 % | ISO 10545-3 |
| MOH'S hardness | ≤ 6 | ≤ 6 | ISO 10545-3 |
| Moisture expansion | Nil | Nil | ISO 10545-10 |
| Abrasion resistance | Declared by Manu. | Pei 3~5 (Declared on product) | ISO 10545-7 |
| Mechanical Characteristics — | | | |
| Flexural strength(MOR) | \geq 35N/mm ² (350kg/cm ²) | ≥ 37N/mm² (370kg/cm²) | ISO 10545-4 |
| Breaking strength | 1300 Newton | 2000 Newton | ISO 10545-4 |
| Impact resistance | Declared by Manu. | No indentation or cracking | ISO 10545-5 |
| Safety Characteristics — | | | |
| Skid resistance(Dynamic Friction Coefficie | nt) ≥ 0.4 | ≥ 0.4 | ISO 10545-17 |
| Density | ≥ 2.0 gm/cc | ≥ 2.3 gm/cc | DIN 51082 |
| Thermo Photo Characteristics ———— | | | |
| Thermal shock resistance | Resistant to 10 cycles | Pass Min. 10 cycles | ISO 10545-9 |
| Frost resistance | Frost Proof | Need to comply with the standard | ISO 10545-12 |
| Coefficient of Linear thermal Expansion | 9x10 ⁻⁶ K-1 | <5.86x10 ⁻⁶ K-1 | ISO 10545-8 |
| Color resistance to UV light | Resistant | Resistant | ISO 10545-16 |
| Chemical Characteristics — | | | |
| Chemical resistance: House Hold Chemicals & Swimming Pool Salts | Min. Class - GB | Confirm to Classes - GA | ISO 10545-13 |
| Chemical resistance: Low Concentrations Acids & Alkalis | Min. Class - GIB | Confirm to Classes - GIA | ISO 10545-13 |
| Chemical resistance: High Concentrations Acids & Alkalis | Min. Class - GHB | Confirm to Classes - GHA | ISO 10545-13 |
| Stain resistance | Min. Class - 3 | Min. Confirm to Class - 4 | ISO 10545-14 |

Packing Details

| DIMENSION(MM) | 1200x1200mm |
|-----------------------|---------------|
| SLAB / BOX | 2 pcs |
| COVERAGE AREA / BOX | 2.88 sq. mtr. |
| WEIGHT / BOX (APPROX) | 60 kg |