500x MATT/MORROCAN 500mm PARHING PUNCH/PUNCH







600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES





CARINO





Super Flatness



Low Maintenance









MOROCCAN 01



GVT **PGVT TILES** _MORROCAN



600x 600mm

DIGITAL


GLAZED

VITRIFIED

TILES








MOROCCAN 03







Low Maintenance

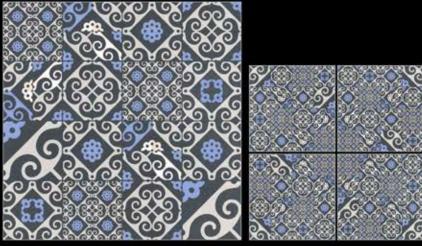





MOROCCAN 05





GVT PGVT TILES __MORROCAN




600x 600mm


DIGITAL

GLAZED

VITRIFIED

TILES

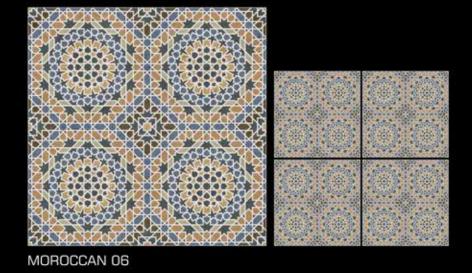

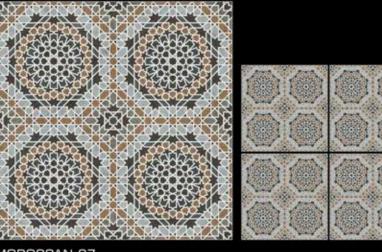

MOROCCAN 07






Stain Resistan



Super Flatness





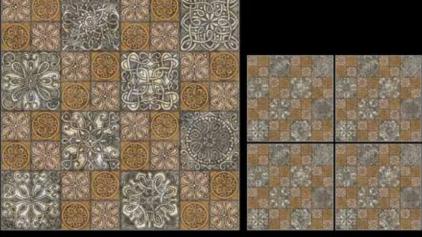








MOROCCAN 09

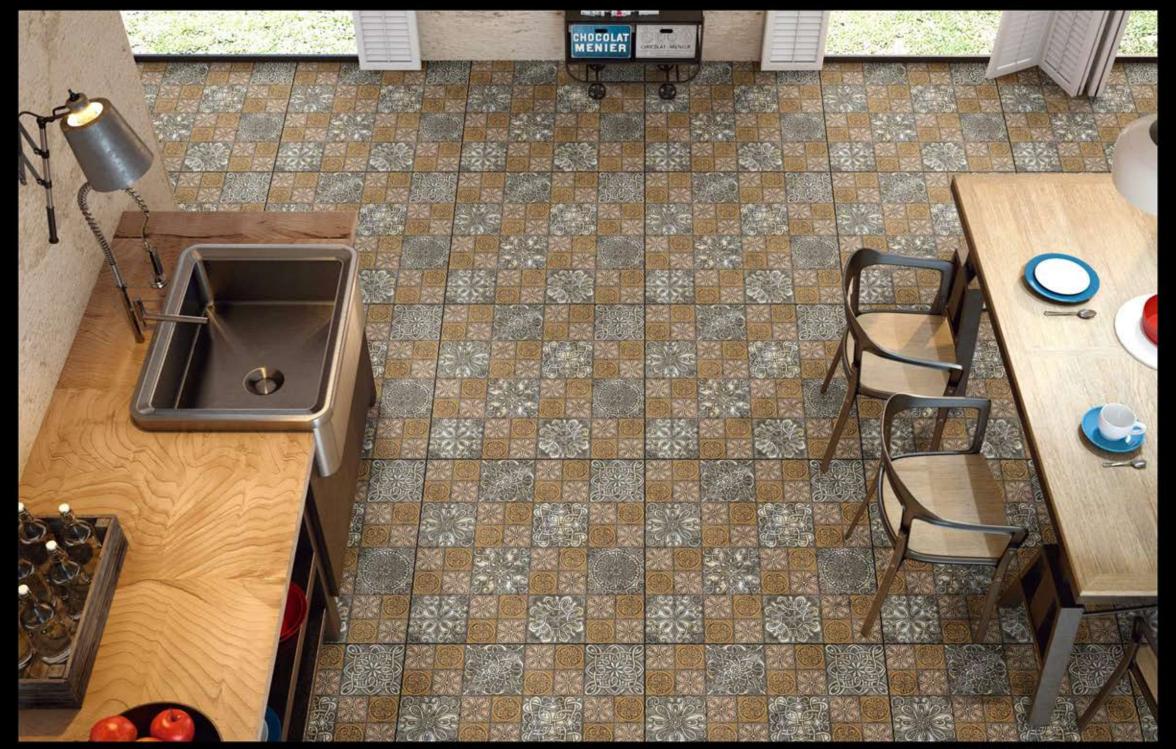



600x **600**mm

DIGITAL

GLAZED

VITRIFIED

TILES



| ~ | | | | | 2 (000 | 100 | 2000 | \mathcal{F} | 500 | 20 | 00 |
|----|----------|-----------|---------|-----------|--------|-----|------|---------------|-----|----------------------------|----|
| E) | 1 to 100 | ROUNE S | 1 1 1 M | 10 | N W | | 3. L | 2 | 3 | | ij |
| 2 | | 016310 | (A) | 000 | 325 | | * | 8 | * | \mathcal{H} | E. |
| | 等于(| (a) (a) | 海王孝(| (W) | €a±e | | | 3 | ᇓ | X | |
| 3 | | \sim | 100 CO | \approx | | | | 2 | | $\widetilde{\mathfrak{P}}$ | |
| =(| 633 |) L. V.A. | 646 | | 363 | | | 9 | | | |
| | | | | | | | | | | | |

MOROCCAN 10





MOROCCAN 11







Super Flatness













MOROCCAN 13 BEIGE





600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES



MOROCCAN 13 BLUE



MOROCCAN 13 GREY





Stain Resistan



Super Flatness





Low Maintenance





MOROCCAN 14 BEIGE





MOROCCAN 14 GREY







600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES



MOROCCAN 15





MOROCCAN 16





Stain Resistan



Super Flatness











MOROCCAN 19



GVT PGVT TILES _MORROCAN



600x **600**mm

DIGITAL


GLAZED

VITRIFIED


TILES



MOROCCAN 18 BEIGE



MOROCCAN 18 GREY

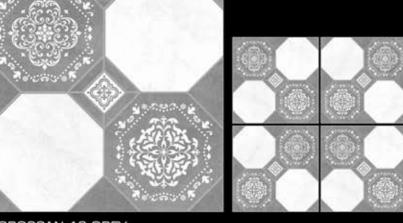








Super Flatness




Low Maintenance



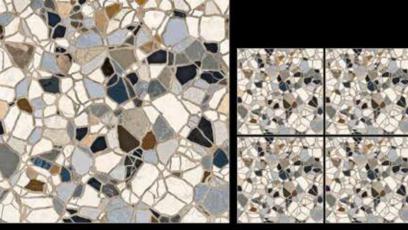

MORTO BEIGE

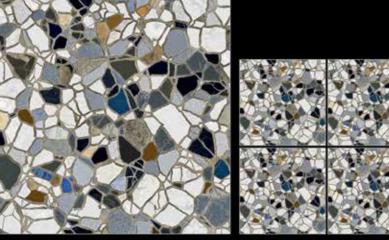

MORTO NATURAL









DIGITAL

GLAZED

VITRIFIED

TILES



HD Clarity



High Strength



Stain Resistant




Super Flatness




Low Maintenance







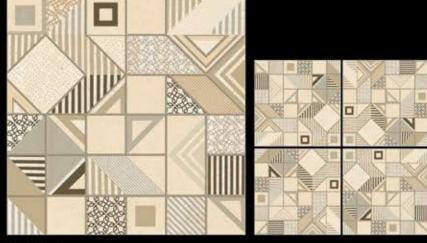

PERSEO



___ moroccan



600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES



MOROCCAN 20



MOROCCAN 21





Stain Resistan



Super Flatness











MOROCCAN 23



moroccan



600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES







MOROCCAN 25









Super Flatness

















moroccan




600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES



MOROCCAN 28



MOROCCAN 29 COOPER








Super Flatness









MOROCCAN 29 GREY





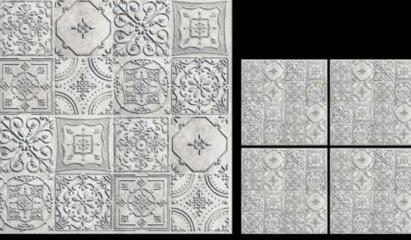

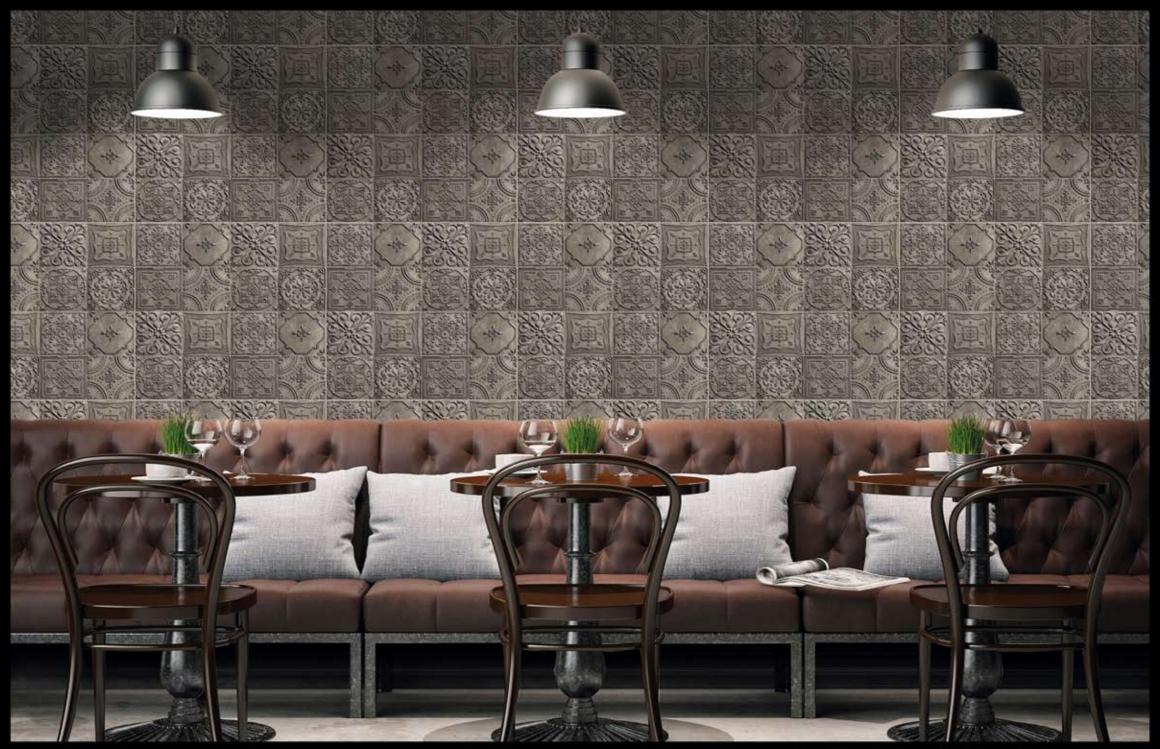

PREVIEW OF TILES: MOROCCAN 29 COOPER

___ moroccan



600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES



MOROCCAN 30



MOROCCAN 31







Super Flatness





MOROCCAN 32







MOROCCAN 33





___ moroccan



600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES







MOROCCAN 35






Super Flatness





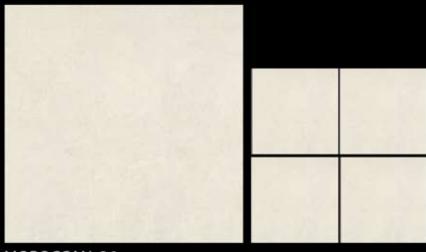





MOROCCAN 36 DECORE



GVT PGVT TILES ____MIRROR



600x 600mm

DIGITAL


GLAZED

VITRIFIED

TILES



MOROCCAN 40

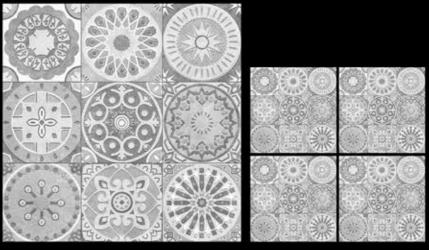


MOROCCAN 41 grey





Super Flatness

Random designs

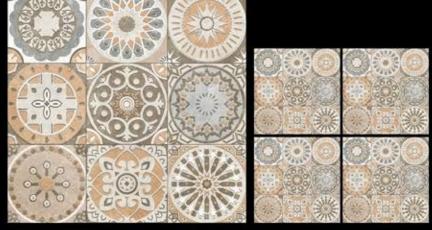

MOROCCAN 41 BROWN



MOROCCAN 42



___ moroccan



600x 600mm

DIGITAL

GLAZED

VITRIFIED

TILES







MOROCCAN 37 DECOR





Stain Resistant




Super Flatness









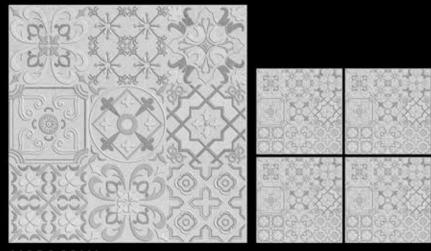

MOROCCAN 39



- · Tile, Kitchen and Bathroom equipment, hardwood, installation materials, solid surface, installation systems (one stop shop)
- · Our strict testing and quality controls (shade and caliber consistency), ensure our standards are above industry standards
- · Use of environmentally friendly technologies and production methods
- · Latest in Double Charged design, well ahead of independent distributors
- · Large product offering that will satisfy the needs of every project, budget or application; commercial or residential, contemporary or traditional

SERVICES

- · Design Consultation
- · Customer Service
- · In-stock selections
- Delivery
- Worldwide logistics



Residential



Retail



Hospitality



Commercial



Restaurants/ Bars



Corporate/ Office



Institutional/ Municipal



Healthcare



Multi-Unit

TECHNICAL SPECIFICATION

| SR. NO. | CHARACTERISTICS | STANDARD AS PER ISO 13006/EN 14411 GROUP BIA | OUF VALUE | TEST METHOD |
|------------|---|---|------------------------|--------------|
| | Regulatory Properties | | | |
| 1 | Deviation in length & Width | ±0.5 % | ±0.1 % | ISO-10545-2 |
| 2 | Deviation in thickness | ±5.0 % | ±4.0 % | ISO-10545-2 |
| 3 | Straightness of sides | ±0.5 % | ±0.1 % | ISO-10545-2 |
| 4 | Rectangularity | ±0.5 % | ±0. % | ISO-10545-2 |
| 5 | Surface flatness | ±0.5 % | ±0.2 % | ISO-10545-2 |
| 6 | Colour difference | Unaltered | No change | ISO-10545-16 |
| 7 | Glossiness | As per. mfg. | Min. 90% | GLOSSO Mtr. |
| - | Structural Properties | | | |
| 8 | Water absorption | <0.50% | <0.20 % | ISO-10545-3 |
| 9 | Apparent density | >2.0 g/cc | >2.10 g/cc | DIN 51082 |
| - 8 | Massive Mechanical Properties | | | |
| 10 | Modulus of rupture | Min. 35 N/mm² | Min. 40 N/mm² | ISO-10545-4 |
| 11 | Impact resistance | As. per. mfg. | Min.0.55 | ISO-10545-5 |
| - 1 | Surface Mechanical Properties | | | |
| 12 | Surface abrasion resistance | As. per. mfg. | Min.Class-3 | ISO-10545-7 |
| 13 | MOH's hardness | As. per. mfg. | Min.4 | EN 101 |
| | Thermo Hydrometric Properties | | | |
| 14 | Frost resistance | No Damge | No Damge | ISO-10545-12 |
| 15 | Thermal shock resistance | No Damge | No Damge | ISO-10545-9 |
| 16 | Moisture expansion | Nill | Nill | ISO-10545-10 |
| 17 | Thermal expansion(COE) | Max. 9.0 x 10-6 | Max. 6.5 x 10-6 | ISO-10545-8 |
| 18 | Crazing resistance | As. per. mfg. | Min. 10 Cycle | ISO-10545-11 |
| - 8 | Chemical Properties | | | |
| 19 | Chemical resistance | No Damge | No Damge | ISO-10545-13 |
| 20 | Stain resistance | Resistance | Resistance | ISO-10545-14 |
| 10 | Thermo Hydrometric Properties | | | |
| 21 | Anti skid (COF) | As. per. mfg. | Matt<0.52,Glossy<0.21 | ISO-10545-17 |
| 22 | Slip resistance | As. per. mfg. | <144 mm² | ISO-10545-17 |
| 23 | Fire resistance | As. per. mfg. | Fireproof | N.A. |
| 24 | Lead &Cadmium given off by glazed tiles | As. per. mfg. | Dose not yelld pb & cd | ISO-10545-7 |

PACKING DETAILS

| Sr.No. | Dimentions (mm) | No. of Tiles / Boxes | Coverage Area in Sq.Mtr. | Approx Weight / Box | | |
|--------|-----------------|----------------------|--------------------------|---------------------|--|--|
| 1 | 600 x 600 | 4 | 1.44 Sq.Mtr. | 27.00 Kgs. Approx | | |

DISCLAIMER: COMPANY reserves the right to delete & amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at any time. The colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of colours, sizes, references should be verified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE ENTERTAINED ON TILES ALREADY LAID/FIXED. Complaint of decoration done outside **COMPANY**'s facilities will not be entertained.

NOTES:

Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right of change the specification without prior notice. Sometime variation in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions in the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed

GENERAL NOTES:

Any Complaint must be must be brought to the company's notice within 10 days of purchase & before fixing of tiles

EXCLUSIVE APPLICATIONS































